



# PFP Sprayers

Equipment Solutions for Epoxy  
Intumescent Fireproofing Materials



PROVEN QUALITY. LEADING TECHNOLOGY.

# When Material is This Critical, Count on Graco

## Protecting steel, assets and lives is serious business

Built for passive fire protection (PFP) materials, Graco equipment handles the toughest epoxy intumescent fire protection coatings.

### Graco XM™ PFP Plural-Component Sprayer

- Handles two-part materials from 1:1 to 10:1
- Provides precise ratio control within  $\pm 5\%$
- Ensures accurate, on-ratio mixing to reduce material waste
- Virtually eliminates the difficult task of removing material that is improperly proportioned
- Fast startup times due to performance of heating system

### Applications

- Pipe racking
- Structural steel
- Storage tanks
- Onshore and offshore oil rigs
- Living quarters



## Get serious with Graco technology

### Proven ratio assurance

Simply enter the mix ratios into the control panel. If off-ratio conditions should occur, the system will stop production, preventing any off-ratio material from reaching your project.

### Data reporting - for confidence the job was done right

Project data such as spray pressures, temperatures, actual ratio, and total flow output can be downloaded onto a flash drive. With this data, you can verify that materials were sprayed at the proper ratios and requirements set by the coatings manufacturer.

### Consistent temperature control

The XM PFP Sprayer maintains temperature set points of the hose and materials - no more heater adjustments and no more material charring due to overheating. Closed-loop technology adjusts the heaters to achieve optimum spray performance in the most extreme conditions.



# Technology Delivers Peace of Mind

## Intuitive User Controls

- Displays ratio readings in real-time for ultimate spraying control
- USB drive for data reporting
- Displays current tank levels and spray temperatures

## Heat Control

- Easy to use “set and forget” temperature controls
- Maintains a consistent temperature on five heat zones (A and B material, hose and pressure pots)

## Viscon® HF Heater

- Supports high production rates
- 5400 W - high efficiency core
- Cleanable design
- Set and forget fluid temperature

## Heated Hose Set

- Set and forget hose temperature
- Heated mix manifold
- Provides faster spray pattern and reduced waste

## Level Sensors

- Automatically refills tanks when material reaches a certain level

## Check-Mate® Feed System

- Proven Graco supply system – 5-gal (20 l) pail

## Heated Pressure Pots

- Circulates water for better heat transfer
- 20-gal (76 l)

## Hot Water Flush Kit (optional)

- Up to 180°F (82°C) max flush temperature
- Auto fill with water line connection
- 6-gal (23 l) tank capacity



# Technology that Boosts Productivity


## An easier way to take control

The intuitive user interface provides two display modes: “setup” for entering parameters and a “run” mode for operation. The user interface monitors and tracks mix ratio, pressure, temperature and flow, and allows you to program maintenance schedules. It shuts down the system if off-ratio conditions exist, and with its USB port, you can download historical spraying data.

### Simplify the ratio checking process

The ratio checking process for epoxy intumescent is important and documentation is often required. With the XM PFP's controls, it's easy to make sure your material is on ratio.

1. Initiate ratio check process on the machine controls
2. Operator dispenses A and B materials into test beakers, and weighs samples
3. Operator enters A and B weights on the control screen
4. Control screen provides “Pass” or “Fail” message, and logs the results in the USB data.

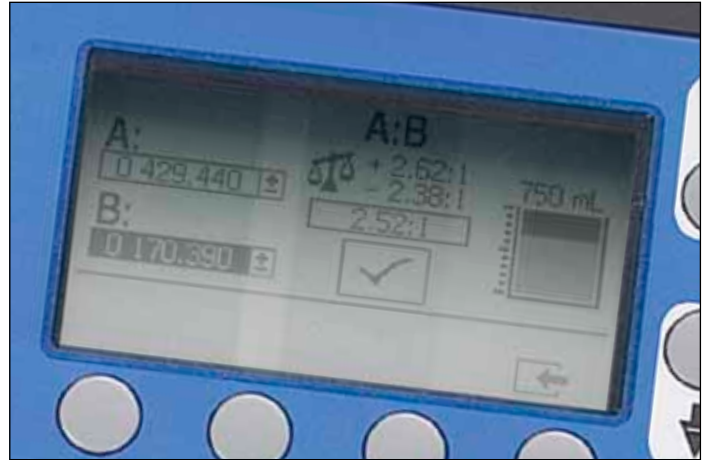

The user interface also lets you keep track of your fluid supply and spray parameters.

You can:

- Monitor the temperature of supply tanks, fluid heaters and hose heat
- Set temperatures for A and B materials and hose.
- Set and monitor tank levels, turn automatic tank filling on and off

## Graco XHF™ Spray Gun

- High-flow, high pressure gun
- Easily handles high-viscosity coatings, fiber filled materials and epoxy intumescent materials
- Reduced clogging means more uptime
- Rated to 7250 psi (500 bar, 50 MPa)





# Xtreme® PFP Sprayer

## Small jobs made easy

Get in and get smaller jobs done fast. Ideal for spraying hot-potted PFP epoxies, the Xtreme PFP Sprayer is easy to clean with its quick knock-down, double-ball pump.

### *NXT® Air Motor*

- Standard de-icing feature keeps you up and running

### *Handles high-viscosity coatings*

- 6500 psi (448 bar) working pressure
- Large inlet check with extended ball travel
- Pail ram plate with high down force and air-assisted removal
- Large outlet check for improved pattern control

### *Compact cart-mounted*

- Heavy-duty cart withstands extreme conditions
- Easy handling for one person



## Worldwide Support

With infrastructure throughout the world, your company will benefit from Graco's knowledgeable, global network of professionals.



### Responsive Service

Graco has close working relationships with many of the world's leading manufacturers and material suppliers. With Graco, you can expect responsive service and support, as well as the accuracy and reliability you demand from your manufacturing equipment.



### Training

Graco offers valuable hands-on learning and equipment training at its training centers in Minneapolis, MN; North Canton, OH; Maasmechelen, Belgium; and Shanghai, China. Convenient online training courses are also available.



### Distribution

With a global distribution network, you can count on quick turnaround times for replacement parts and service. With Graco's authorized distributors, you have access to experts who understand the unique needs of your business.

# Technical Specifications

| MODEL  | XM PFF   | XTREME PFF  |
|--|--|---|
| Mix Ratio Range                              | 1:1 - 10:1 (In 0.01 increments)  | Hot Potted  |
| Ratio Tolerance Range (before alarm)         | +/- 5%   | No Alarm  |
| Max Flow Rate                                | 3 gpm (11.4 lpm)   | 2.93 gpm (11.1 lpm)   |
| Fluid to Air Pressure Ratio                  | 60:1   | 70:1  |
| Fluid Viscosity Range                        | Handles mastic materials which are loaded into heated tanks with ram-fed priming piston pumps                                    | Handles mastic materials of two parts (A and B) which are mixed then ram-fed  |
| Air Inlet                                    | 1 in npt(f)  | 3/4 in npt(f)   |
| Fluid Inlets                                 | Ram plate fed pail pumps   | Ram plate fed pail pump   |
| Max Fluid Working Pressure of mixed material | 6000 psi (414 bar, 41.4 MPa)   | 6500 psi (448 bar, 44.8 MPa)  |
| Max Fluid Temp                               | 160°F (70°C)   | Hot potted (depends on material)  |
| Incoming Air Supply Pressure Range           | 80-150 psi (5.5-10.3 bar, 0.5-1.0 MPa)   | 80-150 psi (5.5-10.3 bar, 0.5-1.0 MPa)  |
| Max Pump Air Set Pressure                    | 100 psi (7 bar, 0.7 MPa)   | 90 psi (6.2 bar, 0.6 MPa)   |
| Max Tank Pressure                            | 100 psi (7 bar, 0.7 MPa)   | NA  |
| Max Air Consumption                          | 175 scfm (5 meter <sup>3</sup> /min)   | 115 scfm (3.25 meter <sup>3</sup> /min)   |
| Air Filtration                               | 40 micron main filter, 5 micron control filter   | 40 micron filter  |
| Ambient Operating Temp Range                 | 32° - 130°F (0° - 54°C)  | 50° - 130°F (10° - 54°C)  |
| Ambient Storage Temp Range                   | 30° - 160°F (-1° - 71°C)   | 34° - 86°F (1° - 30°C)  |
| Environmental Conditions Rating              | Altitude up to 13,123 ft (4000 m)  | Altitude up to 13,123 ft (4000 m)   |
| Sound Pressure                               | 86 dBA at 100 psi  | 87 dBA at 100 psi, 15 cycles/min  |
| Sound Power                                  | 98 dBA at 100 psi  | 98 dBA at 100 psi, 15 cycles/min  |
| Weight                                       | 2175 lb (987 kg)   | 392 lb (178 kg), includes cart  |
| <b>POWER REQUIREMENTS</b>                    |  |   |
| Voltage (Jumper selectable)                  | <b>Option 1:</b> 220-240V, 3-ph (3 wire plus ground)   | NA  |
|  | <b>Option 2:</b> 380-400 DELTA, WYE, 3-ph (4 wire including neutral plus ground)   | NA  |
| Wattage                                      | 18,400 Watts<br>(23,400 Watts with optional flush water heater)  | NA  |
| Amps   | 65 amps DELTA<br>(38 amps WYE)   | NA  |
| <b>WETTED PARTS</b>                          |  |   |
| Suction Tube (flush)                         | Aluminum   | NA  |
| Tanks  | Stainless Steel  | NA  |
| Flush Pump                                   | Carbide, PTFE, stainless steel, UHMWPE   | NA  |
| Hoses  | Nylon  | Nylon   |
| Pumps (A, B and feed pail)                   | Carbon steel, alloy steel, 303, 440, 17-ph grades stainless steel, zinc and nickel plating, ductile iron, tungsten carbide, PTFE | Carbon steel, alloy steel, 304, 440, 17-ph grades stainless steel, zinc and nickel plating, ductile iron, tungsten carbide, PTFE, leather |
| Metering Valves                              | Carbon steel, nickel plating, carbide, polyethylene, leather   | NA  |
| Manifold                                     | Carbon steel, nickel plating, carbide, 302 stainless steel, PTFE, UHMWPE   | NA  |
| Mixer  | Stainless steel housing with stainless elements  | NA  |
| <b>APPROVALS</b>                             |  |   |
| Machine                                      | CE, ETL to UL 499 and CSA 22.2   | CE  |
| Pressure Tanks                               | ASME, PED  |   |
| Manuals                                      | 3A2776   | 3A2798  |

# Ordering Information

## Plural-Component Sprayers

---

- 262878 Base XM PFP. No feed modules or heated hose bundle. Base XM PFP includes: XM60, Viscon® HF primary heaters, Viscon HP with hose heat supply system, 30:1 Merkur® flush pump, PFP mix manifold, mixer, whip hoses and gun.
- 262869 Complete XM PFP System. Includes base XM PFP with 50 ft (15 m) dual heated hose, mix manifold, 17 ft (5 m) static mix line, 30:1 flush pump, XHF Gun with 429 tip. Includes two Check-Mate® 20-gal (76 l) heated feed modules with agitators and level sensors.

## Single-Component Sprayers

---

Includes 75 ft (23 m) spray line and XHF Gun with 429 tip.

- 16P957 Xtreme PFP, floor mount  
16T311 Xtreme PFP, cart mount

## Supply Processing Equipment

---

- 24P883 Heated Supply Module. Includes 40:1 Check-Mate, heated pressure tank, agitator, level sensor, and bottom outlet feed hose and connection.
- 24P884 Level sensor kit. Replacement for XM PFP heated tanks.
- 24P831 Level sensor probe replacement
- 16T525 Viscon LT heater for tank heat circulation, 1750 W
- 24P885 XM PFP feed module agitator
- 24P835 Husky™ 205 hot water circulation pump for tanks or heated hose
- 262896 Tank dryer kit. Provides additional filtration and moisture control for heated tanks.
- 24P899 XM PFP main line air filter kit (1-1/4 in npt)
- 262853 Viscon HF heater kit, remote controlled. *Not approved for use in explosive atmospheres.*

## Hoses and Guns

---

- 16T122 Heated hose bundle. Includes 50 ft, ¾ in x ¾ in (15 m, 18 mm x 18 mm), 6500 psi (448 bar/44.8 MPa) fluid hoses; ¼ in (6 mm) 4500 psi (310 bar/31.0 MPa) flush hose; and four ½ in (13 mm) heat tubes. Includes scuff guard.
- 16T121 Heated hose bundle. Includes 50 ft, ¾ in x ½ in (15 m, 18 mm x 13 mm), 6500 psi (448 bar/44.8 MPa) fluid hoses; ¼ in (6 mm) 4500 psi (310 bar/31.0 MPa) flush hose; and four ½ in (13 mm) heat tubes. Includes scuff guard.
- 16T316 Static mixer assembly, 12 element, SST
- 24P886 Mix element replacement, SST
- 262890 XM PFP mix manifold with ball valves and check valves, 6000 psi (414 bar/41.4 MPa)
- 237260 XHF Gun repair kit
- 24P832 Xtreme PFP Gun and mix line kit, 75 ft (23 m) - (single component pump to gun)
- 24P833 XM PFP Gun and mix line kit, 17 ft (5 m); includes static mixer - (mix manifold outlet to gun)
- 16T484 Hose, ¾ in (19 mm) ID x 50 ft (15 m), ¾ in (19 mm) npsm (fbc), 6500 psi (448 bar/44.8 MPa) nylon core
- H75050 Hose, ½ in (13 mm) ID x 50 ft (15 m), ½ in (13 mm) npsm (fbc), 7250 psi (500 bar/50 MPa) nylon core
- H75025 Hose, ½ in (13 mm) ID x 25 ft (7.6 m), ½ in (13 mm) npsm (fbc), 7250 psi (500 bar/50 MPa) nylon core
- 262854 XHF Gun, includes XHD 429 tip
- 24P834 XHF Gun swivel, 1/2 in f x 3/8 npsm, PTFE packing, 6500 psi (448 bar/44.8 MPa)

## Accessories

---

- 16T481 Check valve, ¾ in (19 mm) npt (fbc), 7250 psi (500 bar/50 MPa)
- 16T859 Hot water flush kit, 180°F (82°C) with auto fill and temperature control
- 255478 Dosing valve, A or B replacement valve
- 262872 XM PFP sampling valve. Used for weight ratio checks.
- 24P268 Ball valve, 3/4 in (19 mm) npt, 6000 psi (414 bar/41.4 MPa)
- L220C9 XM PFP lower replacement, 220 cc, X-Tuff™ (repair kit 262793)
- L180C9 XM PFP lower replacement, 180 cc, X-Tuff (repair kit 262792)
- L180C7 Xtreme PFP lower replacement, 180 cc, Xtreme Seal (repair kit 24F969) (has inlet ball spacers in a different location)



## ABOUT GRACO

### PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

## GRACO LOCATIONS

### MAILING ADDRESS

P.O. Box 1441  
Minneapolis, MN 55440-1441  
Tel: 612-623-6000  
Fax: 612-623-6777

### AMERICAS

#### MINNESOTA

Worldwide Headquarters  
Graco Inc.  
88-11th Avenue N.E.  
Minneapolis, MN 55413

### EUROPE

#### BELGIUM

European Headquarters  
Graco N.V.  
Industrieterrein-Oude Bunders  
Slakweidestraat 31  
3630 Maasmechelen,  
Belgium  
Tel: 32 89 770 700  
Fax: 32 89 770 777

### ASIA PACIFIC

#### AUSTRALIA

Graco Australia Pty Ltd.  
Suite 17, 2 Enterprise Drive  
Bundoora, Victoria 3083  
Australia  
Tel: 61 3 9468 8500  
Fax: 61 3 9468 8599

#### CHINA

Graco Hong Kong Ltd.  
Shanghai Representative Office  
Building 7  
1029 Zhongshan Road South  
Huangpu District  
Shanghai 200011  
The People's Republic of China  
Tel: 86 21 649 50088  
Fax: 86 21 649 50077

### INDIA

Graco Hong Kong Ltd.  
India Liaison Office  
Room 443, Augusta Point  
Regus Business Centre 53  
Golf Course Road  
Gurgaon, Haryana  
India 122001  
Tel: 91 124 435 4208  
Fax: 91 124 435 4001

### JAPAN

Graco K.K.  
1-27-12 Hayabuchi  
Tsuzuki-ku  
Yokohama City, Japan 2240025  
Tel: 81 45 593 7300  
Fax: 81 45 593 7301

### KOREA

Graco Korea Inc.  
Shinhan Bank Building  
4th Floor #1599  
Gwanyang-Dong, Dongan-Ku,  
Anyang-si, Korea 431-060  
Tel: 82 31 476 9400  
Fax: 82 31 476 9801

## SALES/ DISTRIBUTION/ SERVICE

Call today for product information or to request a demonstration.

**877-84GRACO (1-877-844-7226)** or visit us at [www.graco.com](http://www.graco.com).

Graco Inc. is registered to I.S. EN ISO 9001

North America  
Customer Service  
800-328-0211  
Fax 877-340-6427